KARCHER

PGG 6/1

With a power rating of 5 kW, the petrol-operated synchronous generator PGG 6/1 impresses with up to 10 hours of independent power supply in many commercial and municipal applications.







Order no.

1.042-208.0


- Convenient electric start function with key switch
- Foldable push handle and puncture-proof tyres
- Robust cage frame

| Technical data | | |
|----------------------------|---------|-----------------|
| EAN code | | 4054278547930 |
| Supply voltage | Ph / V | 1 / 230 |
| Sound pressure level | dB(A) | 75 |
| Rated performance | kW | 5 |
| Power | kW | 5.5 |
| Drive type | | Petrol |
| Cubic capacity | cm³ | 390 |
| Engine rating | kW / hp | 9.6 / 13.1 |
| Fuel consumption | l/h | 3.8 |
| Tank capacity | 1 | 25 |
| Runtime at 50% output | h | 10 |
| Runtime at 100% output | h | 6.5 |
| Weight incl. packaging | kg | 92.4 |
| Weight without accessories | kg | 84.7 |
| Dimensions (L × W × H) | mm | 743 × 713 × 670 |

| Equipment | |
|------------------------------------|--|
| Operating state display | |
| DC output (12 V) | |
| Protection class IP 23 | |
| Low oil and overload protection | |
| Fuel gauge | |
| Automatic Voltage Regulation (AVR) | |
| Included in the scope of cupply | |

Included in the scope of supply.

KÄRCHER

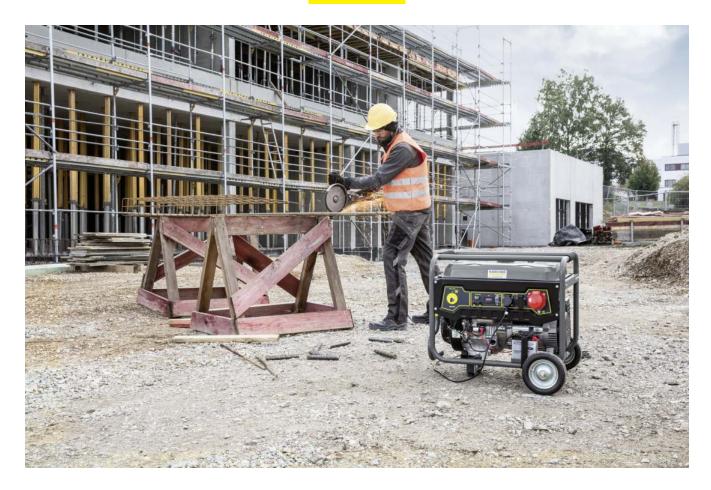



Extraordinary ease of use

- High mobility thanks to the foldable push handle and puncture-proof wheels.
- Electro start function for the convenient and quick start of the petrol engine.



Ultimate reliability and safety

- With overload and oil shortage protection as well as tubular steel frame for maximum safety.
- With automatic voltage regulator (AVR) for the operation of sensitive electronic devices.
- With automatic voltage regulator (AVR) for the operation of sensitive electronic devices.



Very powerful

- 230 V synchronous generator reliably provides continuous power of 5.5 kW.
- Powerful petrol engine for applications of min.6.5 hours per tank filling.