

Threading

Threading electric

SUPERTRONIC 2000 BSPT

Power threader \varnothing 1/4 – 2"

For quick and effortless production of precise and reliable thread connections to approved standards



Product profile

APPLICATION AREA

For threading of

BSPT right: \varnothing 1/4 - 2"

High reduction gears with spur wheel teeth, induction tempered, 7 parallel gear shafts, each ball bearing mounted

High, consistent power transmission when fully loaded

Performance:

Strong 1,010 W motor, double insulated with VDE and CEE, interference free for reliable long-term use

Threading speed:

15 - 25 rpm, rapid reverse 60 rpm (4 x faster reverse with reverse drive)

Maintenance friendly with continuous lubrication

KEY FEATURES

- Secure grip in both turning directions with the hardened, interlocking prism pipe clamp
- Die heads are held firmly in place through direct seating with tension ring locking
- Off-set die head mounting allows for threading even close to walls
- Ideal for confined spaces (corners and shafts)
- User-friendly work with the large mechanism for switching directions
- Reliable motor for long-term use



Easy insertion of the die heads



Use with roll grooving tool ROGROOVER



ROFIX adaptor (No. 71271)



High reduction gears






SUPERTRONIC 2000 BSPT set

Set includes: 71280(SUPERTRONIC 2000 with pipe clamp)
 70823X(1/2") 70824X(3/4") 70825X(1") 70826X(1.1/4")
 70842X(1.1/2") 70843X(2") 71271(ROFIX adaptor),
 1000001953(ROCASE 6414 with inlay)

Can also be used in combination with a roll grooving tool!

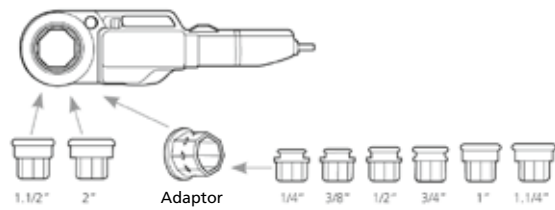

Model	Description	kg	230 V	110 V
SUPERTRONIC 2000 set, BSPT R	1/2" - 3/4" - 1" - 1.1/4" - 1.1/2" - 2"	14.5	71256	71258

Work in confined spaces



Die heads with the tripod universal workbench

