

Threading & grooving

Threading electric

SUPERTRONIC 1250 (BSPT)

Power threader Ø 1/2 - 1.1/4"

For quick and effortless production of precise and reliable thread connections to approved standards



Product profile

APPLICATION AREA

For threading of

BSPT right:	Ø 1/2 - 1.1/4"
Optional (not included in set):	Ø 1/4", 3/8"
NPT:	Ø 1/4 - 1.1/4"

KEY FEATURES

- Ideal for confined spaces (corners, shafts)
- Sturdy and light, even with heavy-duty use
- Compact gear housing with excellent overall size
- High power transmission, quiet running with long service life
- Tough, rugged and durable
- Weight reduction and easy handling

KEY FEATURES

- Die head can be used in both directions (left and right)
- Stable speed by forward and reverse motion

TECHNICAL DATA

Threading speed:	15 - 20 rpm
Rapid reverse speed:	27 rpm
Performance:	800 W
Current:	230 / 110 V
Weight:	4.9 kg
Dimensions:	456 x 168 x 76 mm



Ideal for portable operation due to its compact design and weight of only 4.9 kg



Small head shape (11 cm)



Pipe roughing (optional)



Threading & grooving

Threading electric

SUPERTRONIC 1250 set

Set includes: 7.1470 (SUPERTRONIC 1250) 865008700 (with forged pipe clamp)
 70823X(1/2" BSPT die head) 70824X(3/4" BSPT die head)
 70825X(1" BSPT die head) 70826X(1.1/4" BSPT die head)
 9958581009 (complete in plastic carrying case)


Small – Fast – Light




Pipe clamp



Fig. SUPERTRONIC 1250 set (No. 71450)

Model	Description	 kg	230 V
SUPERTRONIC 1250 set, BSPT	1/2 - 3/4 - 1 - 1.1/4"	13.0	71450
Pipe clamp for SUPERTRONIC 1250	Up to max. 1.1/4"	1.6	865008700

Helical gears for maximum power (800 W)

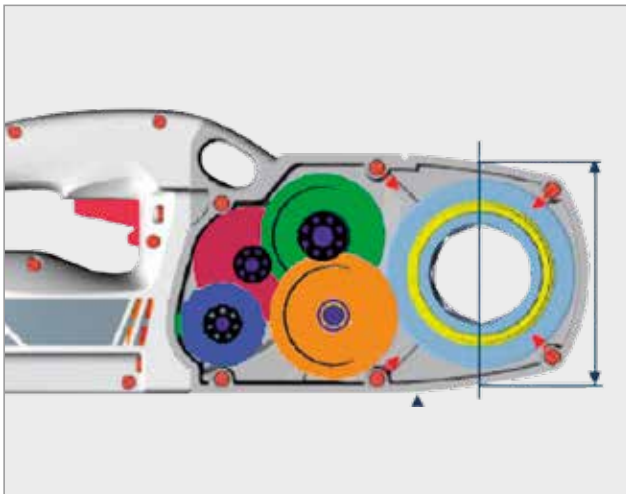

Portable, fast and easy steel pipe processing

