

PGG 8/3

Powerful synchronous generator PGG 8/3 with 7 kW. For the independent power supply with AC and three-phase current on construction sites, in agriculture or in the municipal environment.













1 Extraordinary ease of use

- High mobility thanks to the foldable push handle and puncture-proof wheels.
- Electro start function for the convenient and quick start of the petrol engine.

2 Ultimate reliability and safety

- With overload and oil shortage protection as well as tubular steel frame for maximum safety.
- With automatic voltage regulator (AVR) for the operation of sensitive electronic devices.

3 Very powerful


- Synchronous generator provides continuous power of 7 kW (400 V) or 2 kW (230 V).
- Powerful petrol engine for applications of min. 5.5 hours per tank filling.

4 Operation of Kärcher high-pressure cleaners

- For use of high-pressure cleaners in areas without an external power supply
- Suitable for selected, three-phase high-pressure cleaners.

TECHNICAL DATA AND EQUIPMENT



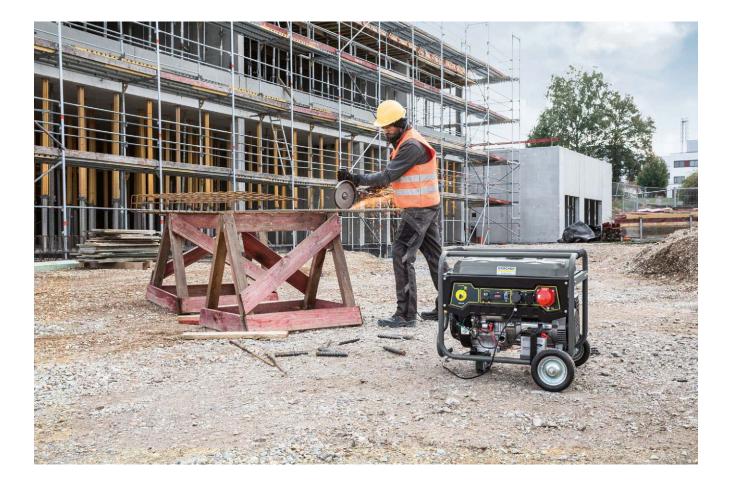

PGG 8/3

- Reliably supplies three-phase current (400 V)
- Convenient electric start function with key switch
- Robust cage frame

Technical data		
Order no.		1.042-209.0
EAN code		4054278547947
Voltage	V	400
Phase	Ph	3
Rated performance	kW	2
Rated performance (three-phase current)	kW	7
Max. performance	kW	2.5
Max. performance (three-phase current)	kW	7.5
Motor type		Petrol
Cubic capacity	cm³	440
Motor rating	kW / hp	11.8 / 16.1
Tank capacity	Ţ	25
Runtime at 50% output	h	7
Runtime at 100% output	h	5.5
Weight	kg	89.7 / 90 / 97.4
Dimensions (L × W × H)	mm	743 × 713 × 670
Equipment		
Operating state display		1
DC output (12 V)		1
Protection class IP 23		1
Low oil and overload protection		I
Fuel gauge		1
Single phase socket type F (Schuko)		I
Three-phase socket CEE (16 A)		1